



Electrical Specification

ITEMS	ANT>>LOW	ANT>>High	UNIT
Center Frequency [fo]	1747.5	1842.5	MHz
Bandwidth [BW]	fo ±37.5 [1710~1785]	fo ±37.5 [1805~1880]	MHz
Insertion Loss in BW	3.0	3.0	dB max
Ripple in BW	2.3	2.3	dB max
Return Loss in BW ☒ ANT Port	15.0	15.0	dB min
VSW Rin BW ☒ ALL Port			max
Attenuation ☒ Absolute Value ☐ Relative Value	15dB min @ 1795	15dB min @ 1795	MHz
	dB min @ [1805~1880]	dB min @ [1710~ 1785]	MHz
	dB min @ fo ± [~]	dB min @ fo ± [~]	MHz
	dB min @ fo ± [~]	dB min @ fo ± [~]	MHz
Group Delay Variation	dB min@[~]		ns max
	dB min@[~]		
Input Power	3		W max.
In/Out Impedance	50 Ω		
Operation Temperature Range	-40°C to +85°C		


Mechanical Specification

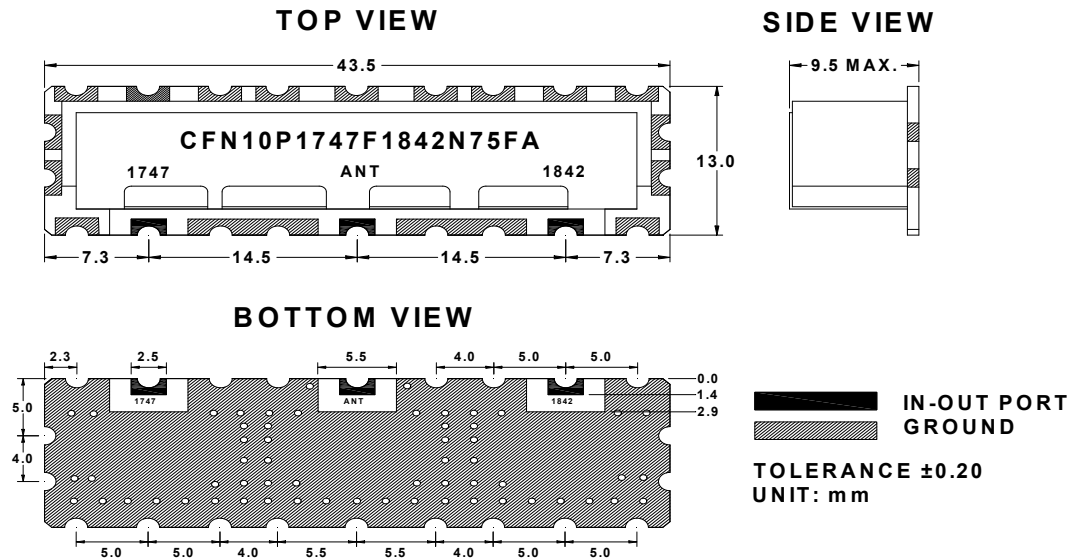


Plot Data

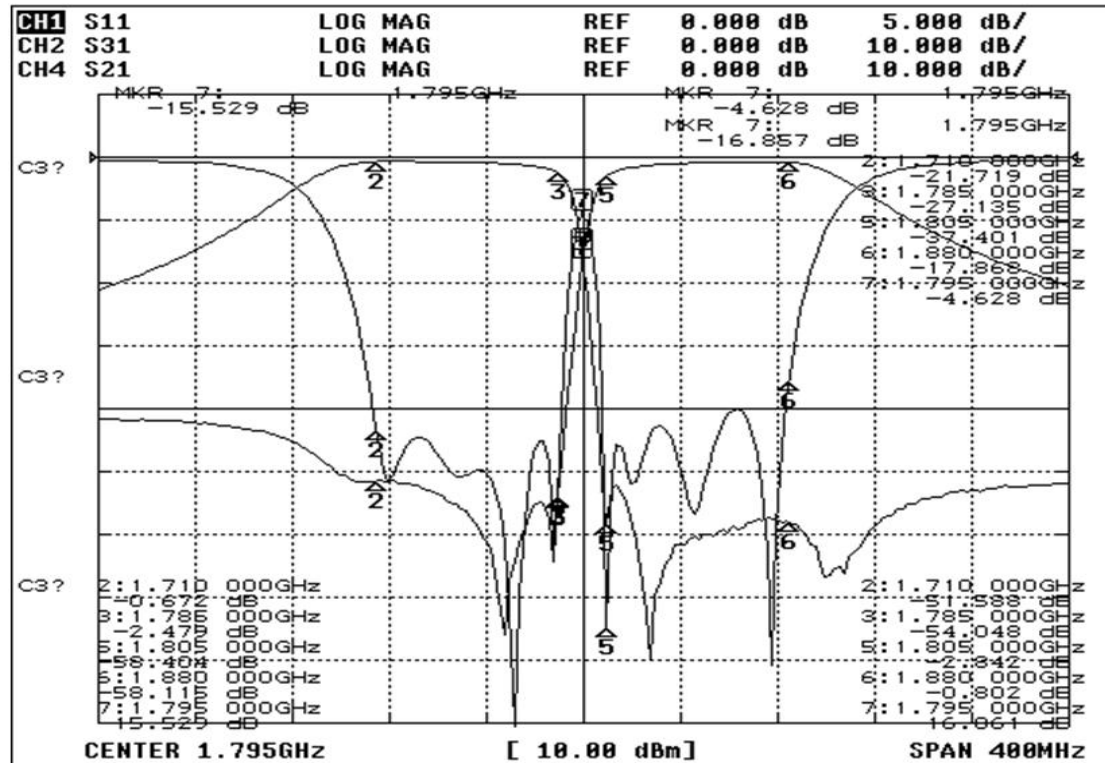

Recommended PC Board Pattern

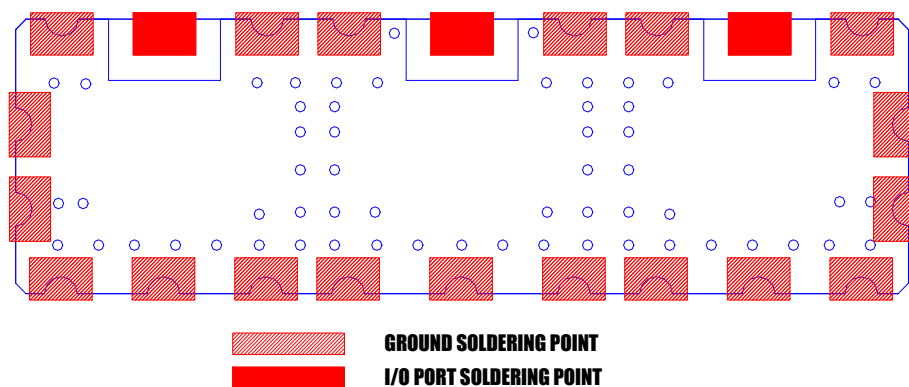

Soldering Condition

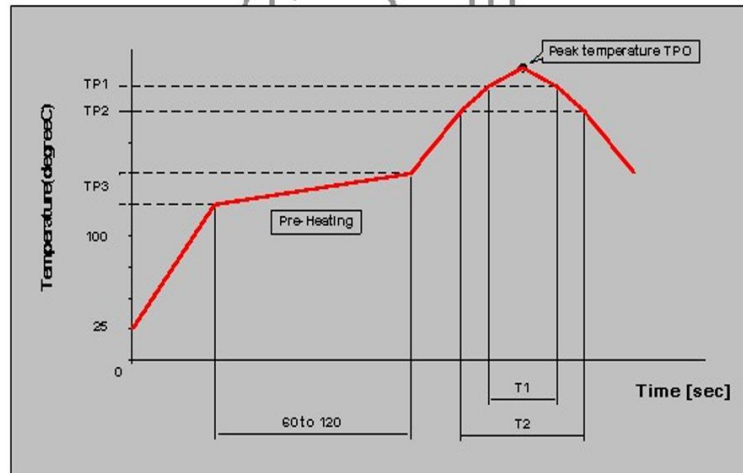

Measuring point of temperature : IN-OUT Terminals of The Device

Reflow Soldering : Both Convection and Infrared Rays, Hot Air and Hot Plate

Reflow standard condition	TP0 (°C)	TP1 (°C)	T1 (s)	TP2 (°C)	T2 (s)	TP3 (°C)
Sn-3Ag-0.5 solder	245+/-5	220	30 to 60	—	—	150 to 180
Test condition of reflow heat resistance	260+5/-0	240	20	220	70	150 to 180